


a perfect fit™







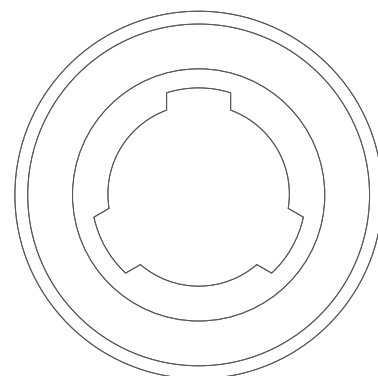





SYSTEM OVERVIEW
CONOLOG®
IMPLANT SYSTEM













camlog

SYSTEM OVERVIEW CONELOG® IMPLANT SYSTEM

SURGERY

			∅ 3.3 mm	∅ 3.8 mm	∅ 4.3 mm	∅ 5.0 mm		
IMPLANTS	CONELOG® SCREW-LINE Implants, Promote® plus	 Length in mm 7 mm 9 mm 11 mm 13 mm 16 mm	–	C1062.3807	C1062.4307	C1062.5007		
			C1062.3309	C1062.3809	C1062.4309	C1062.5009		
			C1062.3311	C1062.3811	C1062.4311	C1062.5011		
			C1062.3313	C1062.3813	C1062.4313	C1062.5013		
			C1062.3316	C1062.3816	C1062.4316	C1062.5016		
HEALING CAPS	CONELOG® Healing caps, cylindrical	 GH 2.0 GH 4.0 GH 6.0	C2015.3320	C2015.3820	C2015.4320	C2015.5020		
			C2015.3340	C2015.3840	C2015.4340	C2015.5040		
			–	C2015.3860	C2015.4360	C2015.5060		
	CONELOG® Healing caps, wide body	 GH 4.0 GH 6.0	C2014.3340	C2014.3840	C2014.4340	C2014.5040		
			–	C2014.3860	C2014.4360	C2014.5060		
	CONELOG® Healing caps, bottleneck	 GH 4.0 GH 6.0	C2011.3340	C2011.3840	C2011.4340	C2011.5040		
			–	C2011.3860	C2011.4360	C2011.5060		
	PROSTHETICS	IMPRESSION TAKING	CONELOG® Impression posts, open tray		C2121.3300	C2121.3800	C2121.4300	C2121.5000
		CONELOG® Impression posts, closed tray		C2110.3300	C2110.3800	C2110.4300	C2110.5000	
		Impression cap for impression posts closed tray		J2111.3300	J2111.3800	J2111.4300	J2111.5000	
		CONELOG® Bite registration posts		C2140.3300	C2140.3800	C2140.4300	C2140.5000	
FABRICATION OF THE PLASTER MODEL		CONELOG® Lab analogs		C3010.3300	C3010.3800	C3010.4300	C3010.5000	
CONELOG® ABUTMENTS FOR CROWN AND BRIDGE RESTORATIONS	CONELOG® Temporary abutments, titanium		C2239.3300	C2239.3800	C2239.4300	C2239.5000		

SYSTEM OVERVIEW CONELOG® IMPLANT SYSTEM

		∅ 3.3 mm	∅ 3.8 mm	∅ 4.3 mm	∅ 5.0 mm
CONELOG® Esthomic® abutments, straight 	GH				
	1.5-2.5	–	C2226.3815	C2226.4315	C2226.5015
CONELOG® Esthomic® abutments, 15° angled, type A 	GH				
	1.5-2.5	–	C2227.3815	C2227.4315	C2227.5015
CONELOG® Esthomic® abutments, 15° angled, type B 	GH				
	1.5-2.5	–	C2228.3815	C2228.4315	C2228.5015
CONELOG® Esthomic® abutments, 20° angled, type A 	GH				
	1.5-2.5	–	C2231.3815	C2231.4315	C2231.5015
CONELOG® Esthomic® abutments, 20° angled, type B 	GH				
	1.5-2.5	–	C2232.3815	C2232.4315	C2232.5015
CONELOG® Esthomic® abutments, inset 	GH				
	2.0-3.3	C2235.3320	C2235.3820	C2235.4320	C2235.5020
CONELOG® Universal abutments 					
		C2211.3300	C2211.3800	C2211.4300	C2211.5000
CONELOG® Gold-plastic abutments 					
		C2246.3300	C2246.3800	C2246.4300	C2246.5000
CONELOG® Logfit® abutments 	GH 1.0	–	C2550.3810	C2550.4310	C2550.5010
	GH 2.5	–	C2550.3825	C2550.4325	C2550.5025
CONELOG® Telescope abutments, for double crown restorations 					
		–	C2212.3800	C2212.4300	C2212.5000









GH = gingiva height

SYSTEM OVERVIEW CONELOG® IMPLANT SYSTEM

			∅ 3.3 mm	∅ 3.8 mm	∅ 4.3 mm	∅ 5.0 mm
CONELOG® ABUTMENTS FOR CROWNS, BRIDGES AND HYBRID RESTORATIONS	CONELOG® Titanium bases CAD/CAM					
		GH 0.8 GH 2.0	C2244.3308 C2244.3320	C2244.3808 C2244.3820	C2244.4308 C2244.4320	C2244.5008 C2244.5020
ABUTMENT- AND LAB SCREWS	CONELOG® Abutment screws, for CONELOG® abutments, hex					
	M 1.6 M 2.0	C4005.1601 –	C4005.1601 –	C4005.1601 –	– C4005.2001	
	CONELOG® Lab screws, for CONELOG® abutments, hex					
	M 1.6 M 2.0	C4006.1601 –	C4006.1601 –	C4006.1601 –	– C4006.2001	
CONELOG® VARIO SR ABUTMENTS FOR CROWNS, BRIDGES AND HYBRID RESTORATIONS OCCLUSALLY SCREW-RETAINED	CONELOG® Vario SR abutments, straight					
	GH 1.0	–	C2560.3808	C2560.4308	C2560.5008	
	CONELOG® Vario SR abutments, 20° angled					
	GH 3.5 - 1.9 4.0 - 1.8	– –	C2561.3800 –	C2561.4300 –	– C2561.5000	
	CONELOG® Vario SR abutments, 30° angled					
	GH 3.5 - 1.1 4.5 - 1.3	– –	C2562.3800 –	C2562.4300 –	– C2562.5000	
VARIO SR IMPRESSION TAKING FOR BRIDGE AND BAR RESTORATIONS	Vario SR impression caps, closed tray (without surface antirotation)					
	–	–	J2565.4300	–	J2565.6000	
	Vario SR impression caps, open tray (without surface antirotation)					
	–	–	J2566.4300	–	J2566.6000	
VARIO SR FABRICATION OF THE PLASTER MODEL	Vario SR analogs					
	–	–	J2567.4300	–	J2567.6000	
VARIO SR ACCESSORIES	CONELOG® Vario SR abutment screws, hex, for CONELOG® Vario SR abutments, straight					
	M 1.6 M 2.0	– –	C4007.1600 –	– –	– C4007.2000	

GH = gingiva height

SYSTEM OVERVIEW CONELOG® IMPLANT SYSTEM

			∅ 3.3 mm	∅ 3.8 mm	∅ 4.3 mm	∅ 5.0 mm
CONELOG® abutment screws hex, for CONELOG® Vario SR abutments, 20°/30° angled		M 1.6	–	C4005.1601	–	–
		M 2.0	–	–	–	C4005.2001
CONELOG® Vario SR lab screws hex, for CONELOG® Vario SR abutments, straight		M 1.6	–	C4008.1600	–	–
		M 2.0	–	–	–	C4008.2000
CONELOG® lab screws hex, for CONELOG® Vario SR abutments, 20°/30° angled		M 1.6	–	C4006.1601	–	–
		M 2.0	–	–	–	C4006.2001
Vario SR prosthetic screw, hex, M 2.0, for ∅ 3.8/4.3/5.0 mm, yellow anodized		–	–	J4005.2004	–	–
		–	–	–	–	–
CONELOG® ABUTMENTS FOR HYBRID RESTORATIONS		GH 1.0	C2255.3310	C2255.3810	C2255.4310	C2255.5010
		GH 2.5	C2255.3325	C2255.3825	C2255.4325	C2255.5025
		GH 4.0	–	C2255.3840	C2255.4340	C2255.5040
		–	–	–	–	–
CONELOG® ball abutment sets, incl. male part and matrix CM Dalbo®-Plus, red dubication aid/spacer, stabilizing ring and ball abutment analog		GH 1.5	C2250.3315	C2250.3815	C2250.4315	C2250.5015
		GH 3.0	C2250.3330	C2250.3830	C2250.4330	C2250.5030
		GH 4.5	–	C2250.3845	C2250.4345	C2250.5045
		–	–	–	–	–
CONELOG® ball abutments, male part		GH 1.5	C2249.3315	C2249.3815	C2249.4315	C2249.5015
		GH 3.0	C2249.3330	C2249.3830	C2249.4330	C2249.5030
		GH 4.5	–	C2249.3845	C2249.4345	C2249.5045
		–	–	–	–	–
CONELOG® Locator® abutments*		GH 1.0	C2253.3310	C2253.3810	C2253.4310	C2253.5010
		GH 2.0	C2253.3320	C2253.3820	C2253.4320	C2253.5020
		GH 3.0	C2253.3330	C2253.3830	C2253.4330	C2253.5030
		GH 4.0	C2253.3340	C2253.3840	C2253.4340	C2253.5040
		GH 5.0	–	C2253.3850	C2253.4350	C2253.5050
		–	–	–	–	–

* available from summer 2012

TORQUE WRENCH SETTINGS

FOR FINAL FIXATION OF SURGICAL COMPONENTS AND SUPRASTRUCTURES

Article



CONELOG® Implant cover screw



CONELOG® Healing caps
cylindrical
wide body
bottleneck



Vario SR Protection caps



CONELOG® Lab screws

C4006.1601
(Ø 3.3/3.8/4.3 mm)



C4006.2001
(Ø 5.0 mm)



CONELOG® Vario SR Lab screws

C4008.1600
(Ø 3.8/4.3 mm)



C4008.2000
(Ø 5.0 mm)



CONELOG®

Temporary abutments
(Optionally, torque after finished healing period: 20 Ncm)



CONELOG® Abutment screws

C4005.1601
(Ø 3.3/3.8/4.3 mm)



C4005.2001
(Ø 5.0 mm)



CONELOG® Vario SR Abutment screws


C4007.1600
(Ø 3.8/4.3 mm)



C4007.2000
(Ø 5.0 mm)



CONELOG® Esthomic® abutments, straight



CONELOG® Esthomic® abutments, angled 15°/20°, type A und B

CONELOG® Esthomic® abutments, inset

CONELOG® Gold-plastic abutments

CONELOG® Universal abutments

CONELOG® Telescope abutments



CONELOG® Logfit® abutments

CONELOG® Titanium bases CAD/CAM

(from left to right)



CONELOG® Vario SR abutments, straight, 20°/30° angled



Vario SR Prosthetic screw

J4005.2004
(Ø 3.8/4.3/5.0 mm)



Vario SR

Plastic copings/
titanium caps/bases for bars



Torques

tightened by hand



20 Ncm

15 Ncm

All screws have to be tightend after at least 5 minutes with the corresponding torque!

TORQUE WRENCH SETTINGS

FOR FINAL FIXATION OF SURGICAL COMPONENTS AND SUPRASTRUCTURES

Article



J5320.1030

		Torques	Ø in mm	
CONELOG® Bar abutments		C5300.0020 (Ø 3.3/3.8/4.3/5.0 mm)		20 Ncm 3.3 30 Ncm 3.8 4.3 5.0
Healing cap for bar abutment		C5300.0027 (Ø 3.3/3.8/4.3/5.0 mm)		tightened by hand
Prosthetic screw	J4005.1602 (Ø 3.3/3.8/4.3/5.0 mm)		J5316.0510 (hex, extra short) J5316.0501 (hex, short) J5316.0502 (hex, long)	15 Ncm
Bases for bar abutments Titanium bonding base for bar abutments				
CONELOG® Ball abutments		J5300.0011		20 Ncm 3.3 30 Ncm 3.8 4.3 5.0
CONELOG® Locator® abutments		J2253.0001		20 Ncm 3.3 30 Ncm 3.8 4.3 5.0
CONELOG® Scanbody		J5316.0501 (hex, short) J5316.0502 (hex, long)		tightened by hand

All screws have to be tightend after at least 5 minutes with the corresponding torque!

HEADQUARTERS

CAMLOG Biotechnologies AG | Margarethenstrasse 38 | CH - 4053 Basel
info@camlog.com | www.camlog.com

Manufacturer of CAMLOG®- and CONELOG® Products: ALTATEC GmbH, Maybachstraße 5, D-71299 Wimsheim

camlog